

# SPECIFICATION FOR APPROVAL

## 承 认 书

CUSTOMER

客户名称:

NUMBER

编 号: Y-18042602

DESCRIPTION

品 名: 贴片共模电感

QUANTITY

数 量: 10pcs

PART NO.

型 号: BCDM2311-2-821T

DATE

日 期: 2018/6/21

CUSTOMER PART NO.

客户料号:

NOTE

注 解:

APPROVAL SIGNATURE


客户承认签章

APPROVED BY 核 准	Q. C. DEPT. 品 管	CHECKED BY 核 查	DRAWN BY 制 作

客户 CUSTOMER		规格型号 PART NO	BCDM2311-2-821T
----------------	--	-----------------	-----------------

1: 外形尺寸: (单位: mm)


OVERALLDIMESSON (UNIT:mm)

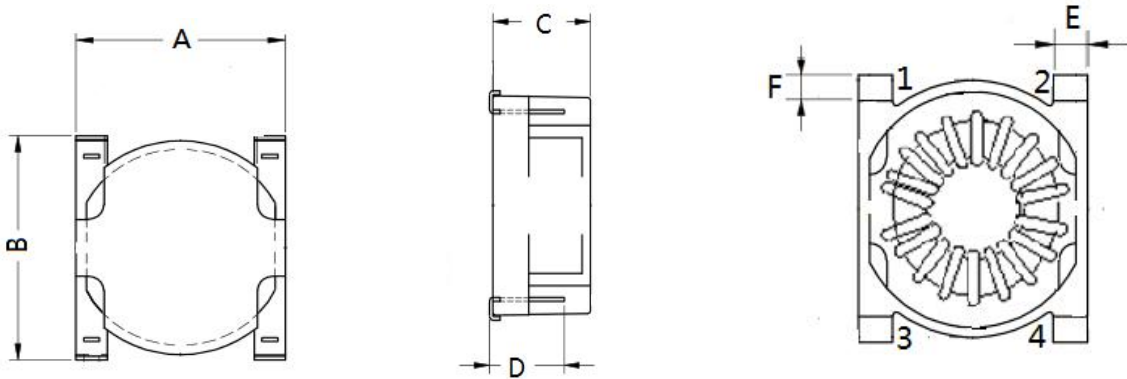

尺寸	A	B	C	D	E	F
单位mm	20.0±0.5	23.0±0.5	11.5 MAX	8.4Ref	3.0Ref	2.4Ref

2: 接线图: 两组线分绕


WIRING DIAGRAM: SEPARATE WINDING



No polarity

3: 焊接尺寸: mm

WELDING DIMENSION: mm



4: 电气性能参数(ELECTRICAL PARAMETERS)

电感量及允许偏差 (1KHz/ 0.25V)	L12=L34: 820uH(MIN)
直流电阻 DC RESISTANCE	16m Ω (MAX)
额定电流 RATED CURRENT	6.5A MAX
阻抗(3MHz) IMPEDANCE	1800 Ω MIN

测试仪表 (MEASUREMENT INSTRUMENT):

HM2791 HM2801 HP4285  
CH19073

在最坏情况下建议零件的温度不超过+125° C。(It is recommended that the temperature of the part does not exceed +125° C under worst case conditions.)

贮存环境(Storage conditions):存放环境温度-20° C至60° C,相对湿度不高于70%,并存放在不含硫和氯的空气气氛中(请不要直接暴露在阳光下) Storage ambient temperature-20° C to 60° C, 70%RH or less, and isolate the parts from sulphic and chloric atm osphere. (Please don't expose to the sun directly)

Note:	SPEC. NO. : Y-18042602 1/2
-------	----------------------------------

客户 CUSTOMER		规格型号 PART NO	BCDM2311-2-821T
----------------	--	-----------------	-----------------


零件工作温度 (Operating temperature of parts):  $-40^{\circ}\text{C} - 125^{\circ}\text{C}$

温升 (Temperature Rise):  $< 55\text{K}$



电性能试验条件 (Est conditions of Electrical Properties):  $20^{\circ}\text{C}$ 、相对湿度33%  
( $20^{\circ}\text{C}$ , 33% RH)

没有特殊规定下 (If not specified differently)

5: 阻抗曲线图 (IMPEDANCE CURVE)

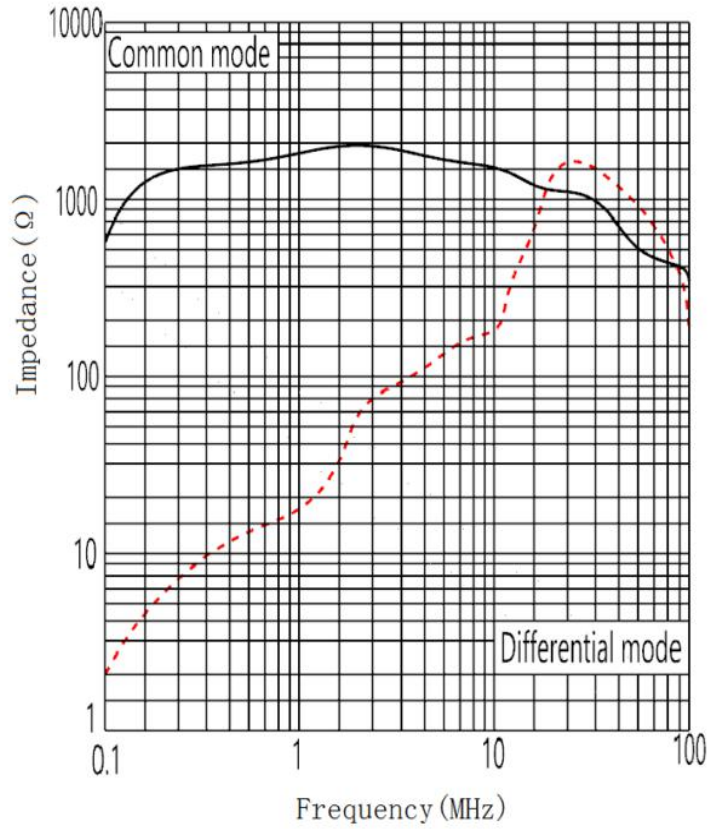

6: 包装 (PACKING)

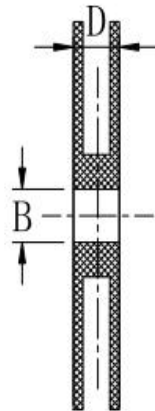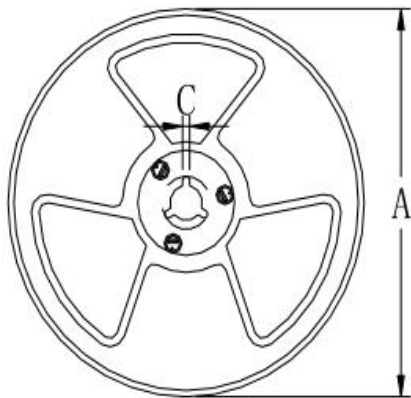

规格	13"	7"
尺寸		
A	$\Phi 330 \pm 2.0$	$\Phi 178 \pm 2.0$
B	$\Phi 90 \pm 2.0$	
C	2.3	
D	30.5	

Note:	SPEC. NO. : Y-18042602 2/2
-------	----------------------------------