

SPECIFICATION FOR APPROVAL

承认书

CUSTOMER

客户名称:

NUMBER

编号:

DESCRIPTION

品名: 贴片共模滤波器

QUANTITY

数量:

PART NO.

型号: BCDCM7060-2-501TB

DATE

日期:

CUSTOMER PART NO.

客户料号:

NOTE

注解:

| |
|------------------------------|
| APPROVAL SIGNATURE 客户承认签章 |
| |

| APPROVED BY 核准 | Q. C. DEPT. 品管 | CHECKED BY 核查 | DRAWN BY 制作 |
|-------------------|-------------------|------------------|----------------|
| | | | |

BCDCM7060-2-501TB

DC COMMON MODE FILTER

FEATURES

- A chip-type common mode filter for large current applications. Common mode impedance surpasses 350Ω at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 3.5A) of any chip-type common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-free soldering.
- The product does not contain regulated substances that are slated to be included in ROHS.



APPLICATIONS

Used for power line noise suppression for any electronic devices
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors, etc

TEMPERATURE RANGES

| | |
|-----------------------|-------------|
| Operating | -40to+125°C |
| Storage (After mount) | -40to+125°C |

Part Number System

BCDCM 7060 -2 -501 T B
① ② ③ ④ ⑤ ⑥

- ① Type:BCDCM
- ② External Dimensions(L×W) (mm):7.0*6.0
- ③ Number of Lines: 2
- ④ Impedance:501=500Ω
- ⑤ Packing:Tape & Reel
- ⑥ Management Symbol:B

ELECTRICAL CHARACTERISTICS

| Part No. | Impedance (Ω) [at 100MHz] | | DC resistance | Rated current | Insulation resistance |
|-------------------|---------------------------|-----|-------------------|---------------|-----------------------|
| | min | typ | (mΩ) max [1 line] | ldc (A) max | (MΩ) min |
| BCDCM7060-2-501TB | 350 | 500 | 20 | 3.5 | 10 |


BCDCM7060-2-501TB

DC COMMON MODE FILTER

TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

BCDCM7060-2-501TB

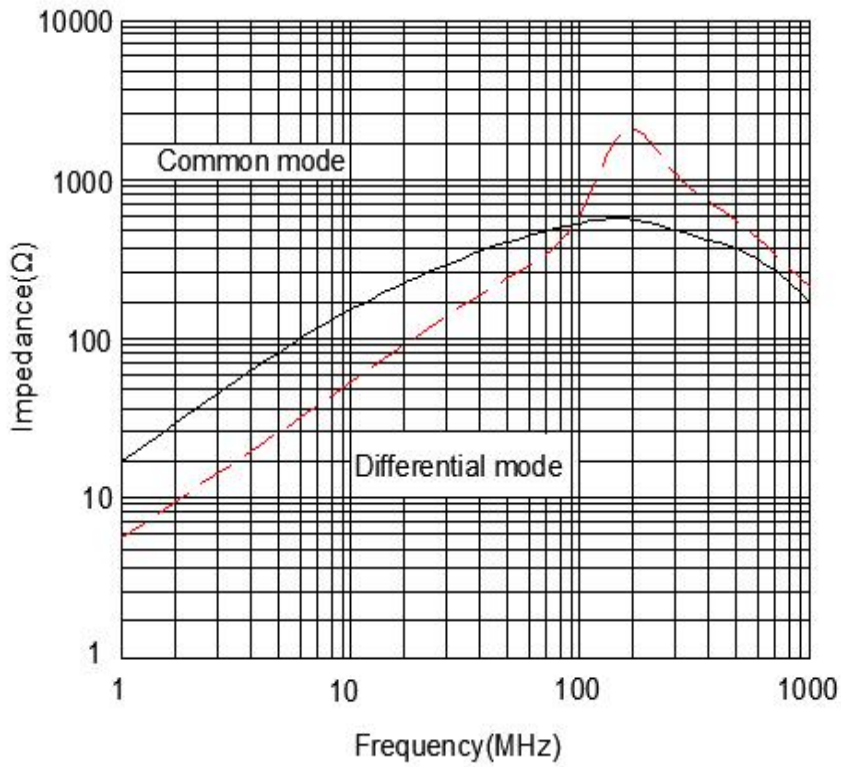


BCDCM7060-2-501TB

DC COMMON MODE FILTER

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED
PC BOARD PATTERN (REFLOW SOLDERING)

◆ Dimensions (mm)

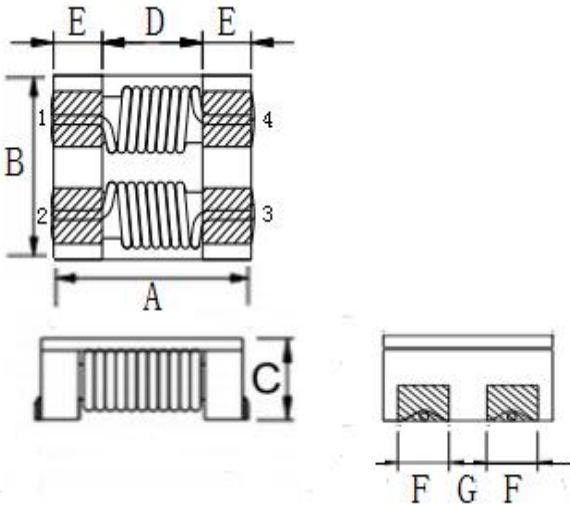

UNIT: mm

A: 7.0 ± 0.3


B: 6.0 ± 0.3

C: 2.8 (MAX)


D: 3.5 E: 1.7

F: 1.5 G: 1.5

◆ Land Pattern (mm)

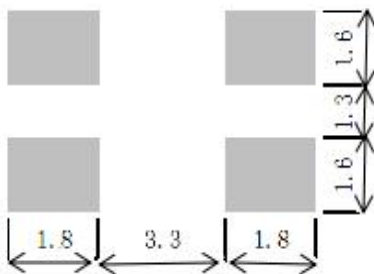

◆ Schematics (Bottom)




No polarity

BCDCM7060-2-501TB



DC COMMON MODE FILTER

Recommended Reflow Temperature Curve

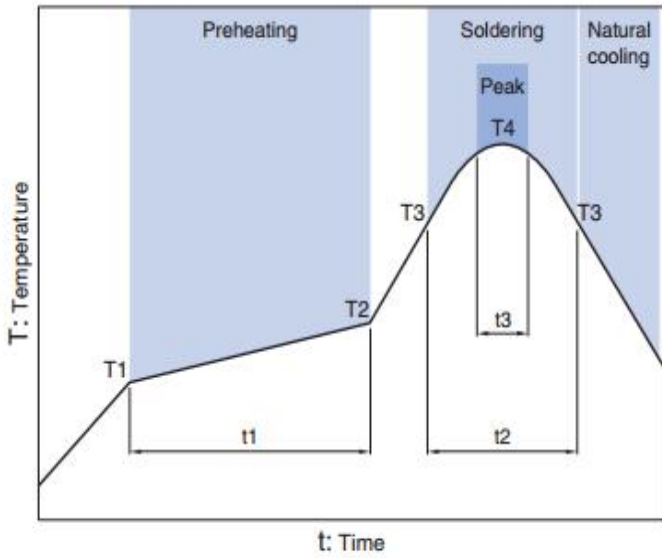

| Preheating | | | Soldering | | Peak | |
|------------|-------|------------|-----------|-----------|-------|------|
| Temp. | Temp. | Time | Temp. | Time | Temp. | Time |
| T1 | T2 | t1 | T3 | t2 | T4 | t3 |
| 150°C | 180°C | 60 to 120s | 230°C | 10 to 30s | 245°C | 5s |

Package
size (mm)

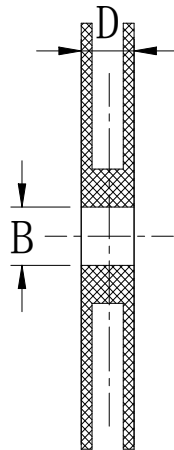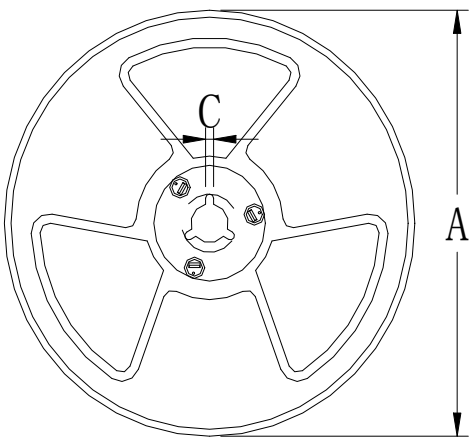

| size | Specs | 13" | 7" |
|------|-------|-------------------|--------------------|
| | A | | $\Phi 330 \pm 2.0$ |
| B | | $\Phi 90 \pm 2.0$ | |
| C | | 2.3 | |
| D | | 21.5 | |